

# EXOFIT NEX™

THE NEXT GENERATION FULL BODY HARNESS

## ExoFit NEX™ Vest Style Harness

Features Tech-Lite™ back D-ring and Duo-Lok™ quick connect buckles.

### MODEL# DESCRIPTION

- 1113001C ExoFit NEX™ Vest Style Harness, 1 D-Ring (SMALL)
- 1113004C ExoFit NEX™ Vest Style Harness, 1 D-Ring (MEDIUM)
- 1113007C ExoFit NEX™ Vest Style Harness, 1 D-Ring (LARGE)

## ExoFit NEX™ Construction/Climbing Harness

Features Tech-Lite™ front, back and side D-rings, Duo-Lok™ quick connect buckles and sewn-in hip pad and body belt.

### MODEL# DESCRIPTION

- 1113151C ExoFit NEX™ Construction/Climbing Style, sewn-in hip & belt, 4 D-Rings (SMALL)
- 1113154C ExoFit NEX™ Construction/Climbing Style, sewn-in hip & belt, 4 D-Rings (MEDIUM)
- 1113157C ExoFit NEX™ Construction/Climbing Style, sewn-in hip & belt, 4 D-Rings (LARGE)
- 1113160C ExoFit NEX™ Construction/Climbing Style, sewn-in hip & belt, 4 D-Rings (X-LARGE)



1113007C



1113157C

The Delta™ II full body harnesses feature the patented Delta™ No-Tangle Pad for extra comfort throughout the neck, shoulders and back.

- Patented spring-loaded stand-up back D-ring for quick and easy connection
- Book-style labels keep information and inspection logs readily available
- Forged alloy steel hardware for maximum strength and durability
- **i-Safe™**  
Every DBI-SALA harness now comes with i-Safe™, the Intelligent Safety System that incorporates RFID and web-enabled communications technologies, providing you with the ability to centrally track inspections, control field inventory and manage critical safety information.



**DELTA™ II STANDARD HARNESS**  
Ideal harness for all general purpose applications  
**110200C**



**DELTA™ II QUICK-CONNECT HARNESS**  
General purpose harness with fast and easy donning  
**1110600C**



**DELTA™ II REDUCED CONDUCTIVITY HARNESS**  
PVC coated hardware and dorsal web loop reduces weight, conductivity and sparking  
**1104730C**



AE542CPW2-6



**PRO™ STANDARD HARNESS**  
Vest style with back D-ring and pass thru legs  
**1191201C**

**PRO™ POSITIONING HARNESS**  
Vest style with side D-rings at hips for positioning  
**1191246C**



**PRO™ HARNESS WITH COMFORT PADDING**  
Comfort Padding on shoulders, back and legs and quick connect buckles  
**1191253C**

### PROTECTA PRO™ SHOCK ABSORBING LANYARDS

6' Pack-style lanyard utilizes a controlled tearing action when subjected to a fall with 1-3/4" polyester webbing. Shock absorber unit encased in UV-Resistant transparent plastic for easy inspection. 100% back-up strap (in shock absorber unit) minimizes impact load. Keeps impact forces to below 900 lbs.

- | MODEL #     | DESCRIPTION                                    |
|-------------|--|
| AE542CPW2-6 | 6' PRO™, Single-Leg, Snap Hooks                |
| AE544CPW2-6 | 6' PRO™, Single-Leg, 1 Snap Hook, 1 Rebar Hook |



AE544CPW2-6

### PROTECTA REBEL™ SELF RETRACTING LIFELINE

Compact, lightweight, rugged aluminium housing. Unique super-strength thin webbing for total security and added length in a compact self retracting lifeline. 6m length nearly doubles the working area of a lanyard without re-connection.

**AD120BC**



## SALA SELF RETRACTING LIFELINES

### SEALED-BLOK SRL WITH RETRIEVAL WINCH

MODEL #	DESCRIPTION
3400850C:	Sealed-Blok SRL with retrieval winch, 30' 3/16" galvanized cable
3400851C:	Sealed-Blok SRL with retrieval winch, 30' 3/16" SS cable

### ULTRA-LOK™ RSQ

Designed to provide both fall arrest and rescue capabilities.

MODEL #	DESCRIPTION
3504550C	Ultra-Lok RSQ SRL 50' galv cable
3504551C	Ultra-Lok RSQ SRL 50' stainless steel cable
3504552C	Ultra-Lok RSQ SRL 50' stainless steel cable and hook
3500101	First-Man-Up telescopic pole, 6'-12' with assisted rescue tool for Ultra-Lok RSQ
3500100	Assisted rescue tool only for Ultra-Lok RSQ



## SALA ADVANCED 5-PIECE HOIST SYSTEM

The Advanced Series Hoist Systems are designed for manhole and confined space entry/retrieval applications.

Includes 12"-29" (305 mm - 737 mm) adjustable offset upper mast (8518001), 33" (838 mm) lightweight lower mast (8518002), and 3-piece lightweight base (8518005).  
Note: Winch not included.  
**8518000**



## SALA EZ STOP™ II SHOCK ABSORBING LANYARDS



MODEL #	DESCRIPTION
1220006C	6' EZ Stop® II, Single-Leg, Snap Hooks
1220007C	3' EZ Stop® II, Single-Leg, Snap Hooks
1220256C	6' EZ Stop® II, Single-Leg, Snap Hooks, Adjustable
1220406C	6' EZ Stop® II, Double-Leg, Snap Hooks
1220706C	6' EZ Stop® II, Double-Leg, Snap Hooks, Cable



### EZ STOP™ II TIE-BACK SHOCK ABSORBING LANYARD

MODEL #	DESCRIPTION
1221106C	6' EZ Stop® II, Single-Leg Tie-Back, Snap Hooks
1221206C	6' EZ Stop® II, Double-Leg Tie-Back, Snap Hooks





### EZ STOP II RETRAX™ SHOCK ABSORBING LANYARD

MODEL #	DESCRIPTION
1221460C	6' EZ Stop® II Retrax™, Single-Leg, Snap Hooks

## SALA PORTABLE GUARDRAIL SYSTEM

Provides versatile fall protection that is portable, free-standing and does not require any engineered anchor points or surface penetration.

MODEL #	DESCRIPTION
7900060	Guardrail base, galvanized, 70 lbs
7900061	Rail, 6' (1.8m), 18.1 lbs
7900062	Rail, 8' (2.4m), 22.1 lbs
7900063	Rail, 10' (3.0m), 28.3 lbs

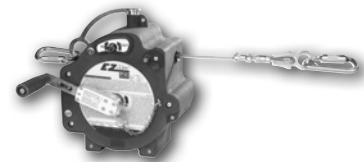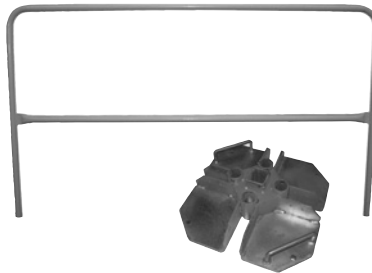

### EZ-LINE™ RETRACTABLE HORIZONTAL LIFELINE SYSTEM

The entire 40 ft EZ-Line system is retracted into an easy-to-carry case.


MODEL #	DESCRIPTION
7605063	40' (12.2m) long

## SALA ANCHORAGE CONNECTORS



### SAFLOK™ CONCRETE WEDGE ANCHOR

Reusable with no special tools required for installation or removal  
**2100085C**



### CONCRETE DETENT ANCHOR

Reusable with no special tools required for installation or removal  
**2101004C**




### SAFLOK™ TOGGLE ANCHOR

Easy-to-use anchor for both concrete and steel applications  
**2100102C**



### TIE-OFF ADAPTOR

An alternative anchorage connector for a fall arrest system  
**1003000C**: 3 ft. in length  
**1003006C**: 6 ft. in length

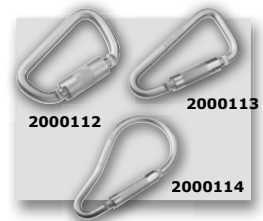

### SAFLOK™ CARABINERS

3,600 Lb rated gate, user friendly even with gloves. Compatible with most connecting rings.  
**2000112**: 11/16" (17mm) opening  
**2000113**: 1-3/16" (30mm) opening  
**2000114**: 2-3/16" (55mm) opening